


FEBRUARY 2020



CORDAGE & ACCESSORIES

*A Personalized
Merchandising Program*

*Since 1947 a Tradition in
Superior Service and
Quality Products*

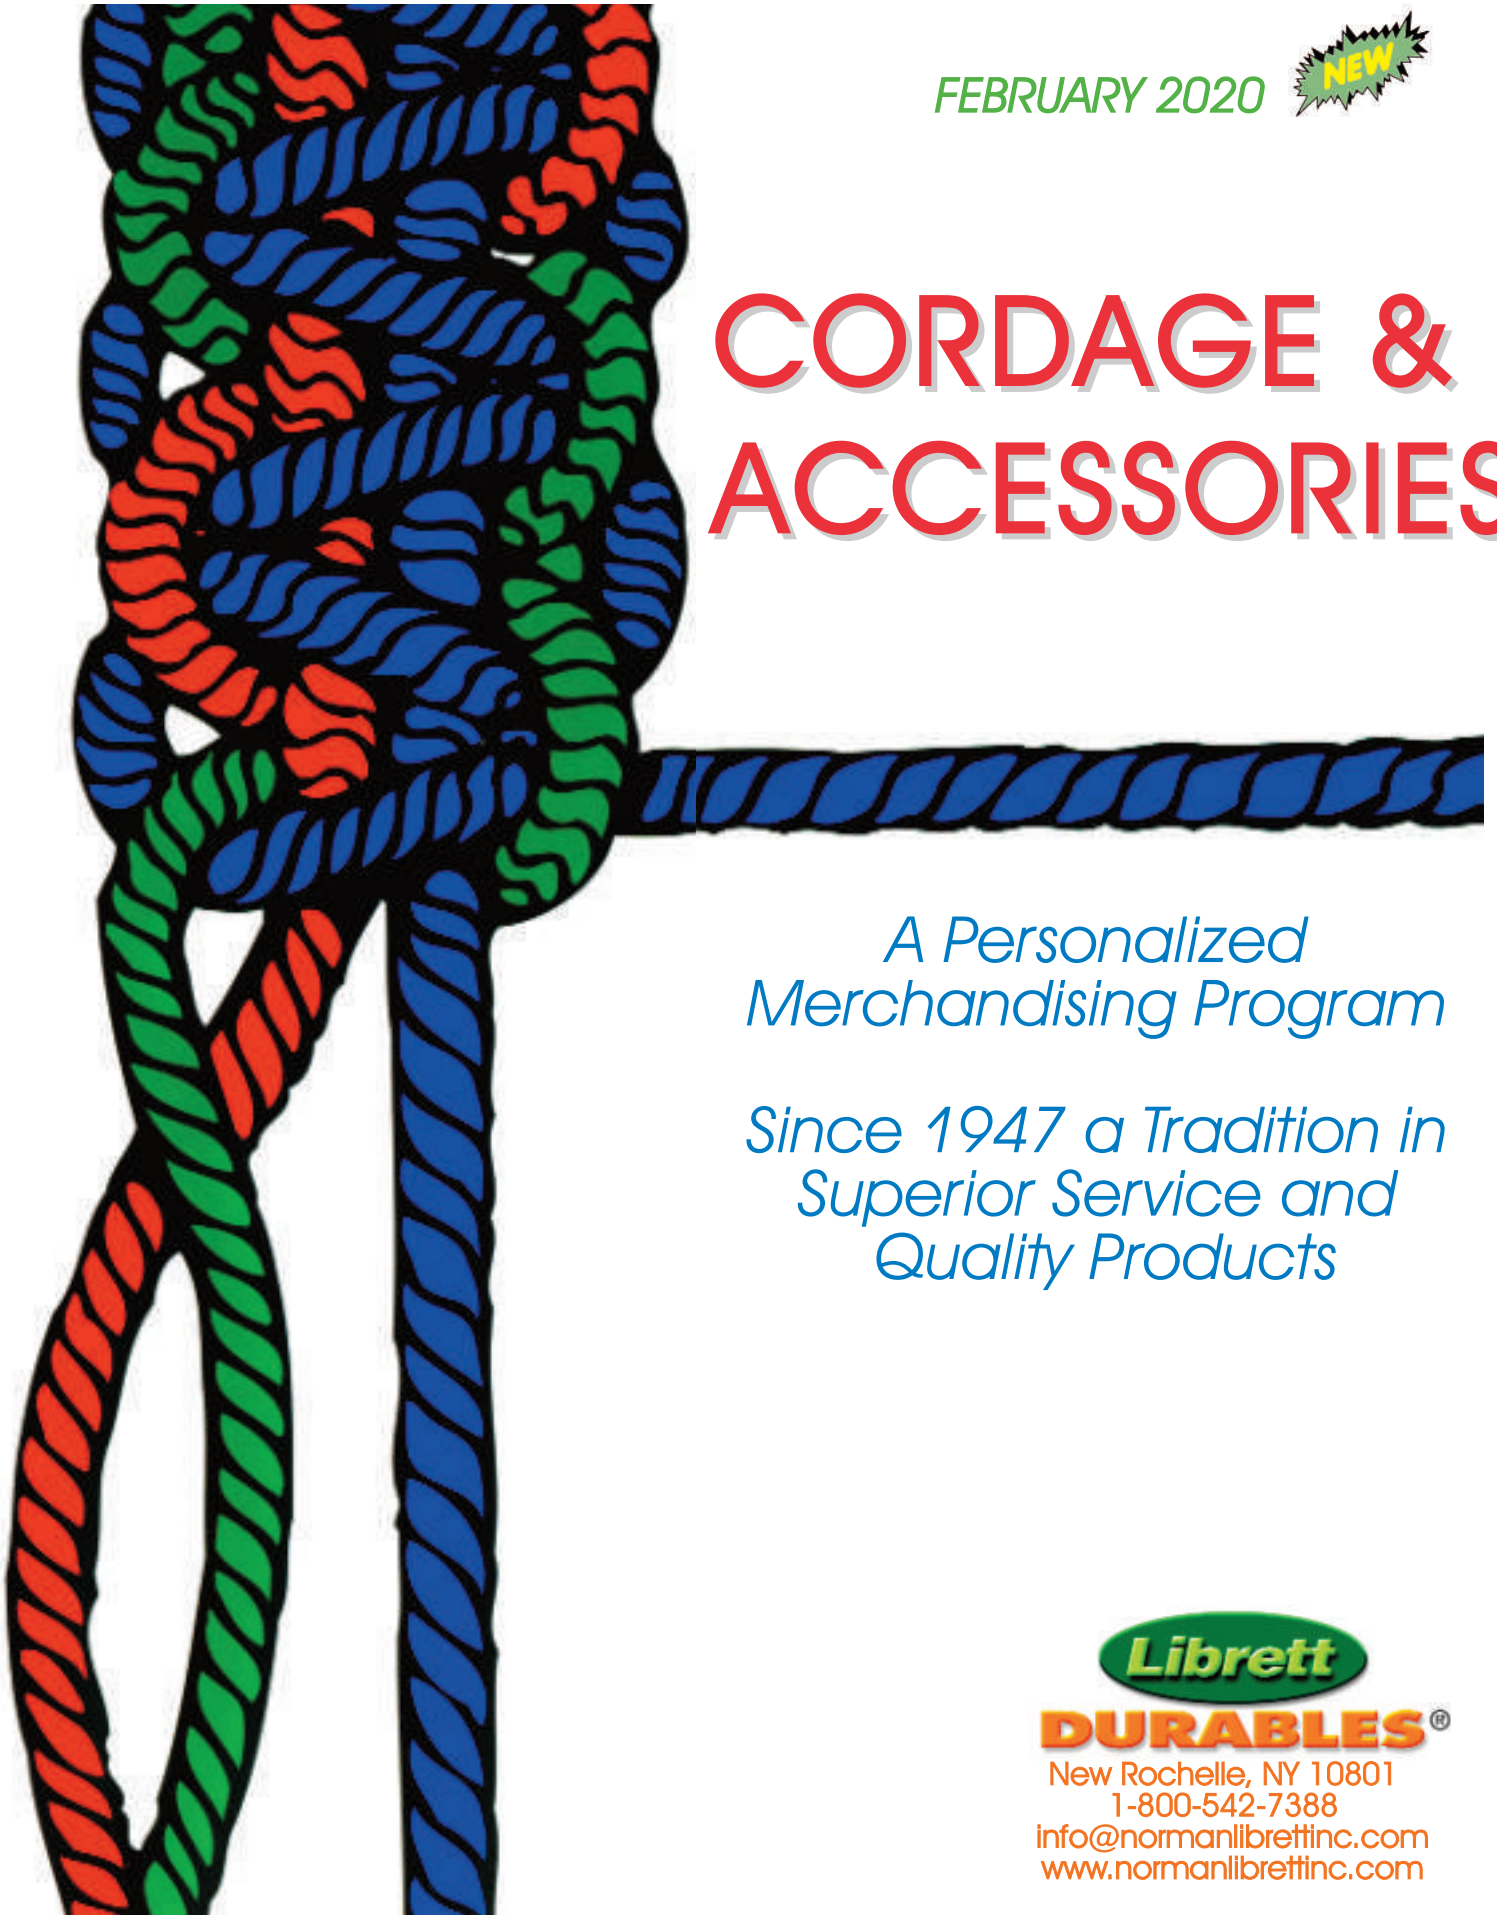

DURABLES®

New Rochelle, NY 10801

1-800-542-7388

info@normanlibrettinc.com

www.normanlibrettinc.com


Table of Contents



Page 1-6




Page 7-11

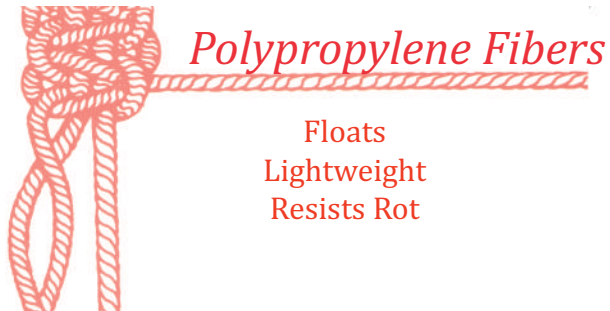

Page 12-15

Hardware Accessories

Page 16-18

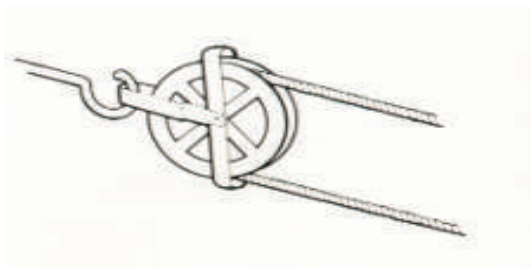

CUSTOMER REFERENCE GUIDE

Page 19

TWISTED COTTON MASON LINE

Strong twisted twine. Made from a blend of natural and man-made fibers for extra strength. Natural stretch, easy to handle, holds knots securely.

Uses: Also referred to as trot line, chalk line and seine twine. Excellent for construction and masonry work. Multi-purpose household and gardening applications.



Item No:	Ply	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CO1006	18	420'	35	12 ea.	023316-101957
CO1002	24	150'	45	12 ea.	023316-100714
CO1007	24	300'	45	12 ea.	023316-100738
CO1012	24	600'	45	6 ea.	023316-101964
CO1014	36	400'	70	6 ea.	023316-001691
CO1016	48	300'	86	6 ea.	023316-101971
CO1017	60	240'	108	6 ea.	023316-101988
CO1018	72	200'	124	6 ea.	023316-101995

BUTCHER'S TWINE

Soft 24 Ply Cotton. Natural stretch, easy to handle, holds knots securely.

Uses: Ideal for kitchen/roisserie, parcel tying, gardening, recreation. A multipurpose household twine.



Item No:	Ply	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CTB244	24	185'	60	12 ea.	023316-101360
CTB248	24	370'	60	12 ea.	023316-101377

PARCEL POST TWINE

Cotton Blend. A lightweight cotton twine.

Uses: Parcel tying and delicate tying. General household twine.



Item No:	Ply	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CTPP08	6	225'	12	12 ea.	023316-101513

COTTON TYING TWINE- 2# CONES

General all purpose twine for large & small bundles. Favorite with stores where economical twine with good strength is needed. Available in various thicknesses.

Uses: Bakery tying twine. General commercial and household tying twine.



Item No:	Ply	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CTC4	4	4800'	9	1 ea.	023316-005125
CTC8	8	2400'	15	1 ea.	023316-005132
CTC12	12	1600'	60	1 ea.	023316-005149
CTC16	16	1200'	39	1 ea.	023316-005156
CTC24	24	780'	57	1 ea.	023316-005163

COTTON BRAIDED TRAVERSE CORD

Manufactured from cotton yarn tightly braided over a low stretch synthetic core for extra strength. It will not flatten when used with pulleys.

Uses: Window/drapery treatments, awning cord, lightweight, indoor clothesline. For use with pulleys. All purpose utility cord.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CTRC35	3.5-7/64"	48'	72	12 ea	023316-101544

VENETIAN BLIND CORD

Manufactured from cotton yarn tightly braided over a low stretch synthetic core for extra strength. It will not flatten when used with pulleys.

Uses: Window/drapery treatments, awning cord, crafts, lightweight, indoor clothesline. For use with pulleys. All purpose utility cord.



Item No:	Size	Footage	Color	Break Test (lbs.)	Std.Pack	UPC Code
CV145W	4.5-9/64"	48'	White	150	12 ea.	023316-000595
CV145B	4.5-9/64"	48'	Black	150	12 ea	023316-101735
CV145E	4.5-9/64"	48'	Ecru	150	12 ea	023316-101742
CV145G	4.5-9/64"	48'	Green	150	12 ea.	023316-101759
CV146	4.5-9/64"	750'	White	150	1 sp.	023316-005170
CV147	4.5-9/64"	3000'	White	150	1 sp.	023316-005187
CV146B	4-1/8"	600'	Black	120	1 sp.	023316-005194
CV146BU	4-1/8"	600'	Black-UNGL.	120	1 sp.	023316-005200
CV147B	4-1/8"	3000'	Black	120	1 sp.	023316-005217
CV147BU	4-1/8"	3000'	Black-UNGL.	120	1 sp.	023316-005224

COTTON BRAIDED MASON LINE

Premium solid braid. Manufactured from natural cotton fibers. Low stretch, easy to handle, abrasion resistant. Smoothness minimizes snags. Uniformly round cord with a smooth surface. Remains soft, flexible and non-kinking. Holds knots securely.

Uses: Lightweight indoor/outdoor clothesline, tie-down, all purpose cord.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CBM4	4-1/8"	48'	90	12 ea.	023316-110034
CBM5	5-5/32"	48'	145	12 ea.	023316-100042

BIODEGRADABLE JUTE TWINE

100% pure twisted jute. High quality, evenly spun with a soft easy to handle feel. Natural colors blend into outdoors. Low stretch and hold knots securely.

Uses: Recycling tying twine, gardening, crafts, sewing burlap bags. A popular economical all purpose household twine.



Item No:	Ply	Footage	Color	Break Test (lbs.)	Std. Pack	UPC Code
CTJ308	3	225'-8 oz.	Natural	65	12 ea.	023316-101445
CTJ332	3	890'-32 oz.	Natural	65	6 ea.	023316-316023
CTJG08	3	225'-8 oz.	Green	65	12 ea.	023316-101421
CTJG332	3	890'-32 oz.	Green	65	6 ea.	023316-003442
CTJ516	5	252'-16 oz.	Natural	108	6 ea.	023316-101452
CTJ532	5	504'-32 oz.	Natural	108	6 ea.	023316-532037

BIODEGRADABLE BINDERS TWINE

100% pure twisted sisal. High quality, very strong. Resistant to sunlight. Low stretch and holds knots securely.

Uses: A popular economical indoor/outdoor tying twine for gardening, recycled papers and arts & crafts.



Item No:	Ply	Footage	Color	Break Test (lbs.)	Std. Pack	UPC Code
CTB520	1	500'-16 oz.	Natural	135	6 ea.	023316-101834
CTB500	1	2500'-5#	Natural	135	10 ea.	023316-101391

BIODEGRADABLE SISAL TWINE

100% pure twisted sisal. High quality, very strong. Resistant to sunlight. Low stretch and holds knots securely.

Uses: Recycling tying twine, gardening and arts & crafts. A popular economical outdoor tying twine.



Item No:	Ply	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CTSFO8	2 Fine	175'-8 oz.	165	12 ea.	023316-101599
CTSF16	2 Fine	350'-16 oz.	165	6 ea.	023316-101605
CTSM06	1 Medium	600'-32 oz.	240	6 ea.	023316-101636
CTSM15	1 Medium	1500'-5#	240	10 ea.	023316-101629
CTS25	2 Medium	900'-5#	317	10 ea.	023316-101650
CTSF8	2 Fine	2250-10#	165	1 sp.	023316-005231
CTS15R	1 Medium	15,000'-50#	240	1 rl.	023316-005248
CTS25R	2 Medium	9,000'-50#	317	1 rl.	023316-005255

Economy BRAIDED COTTON CLOTHESLINE

All purpose unpolished solid braid. Manufactured from a blend of cotton and man-made fibers. Economy lightweight braid.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CDS605	#6-3/16"	50'	165	12 ea.	023316-100141
CDS705	#7-7/32"	50'	250	12 ea.	023316-000540
CDS710	#7-7/32"	100'	250	12 ea.	023316-100103
CDS720	#7-7/32"	200'	250	12 ea.	023316-006757
CGS805	#8-1/4"	50'	300	12 ea.	023316-100127
CGS810	#8-1/4"	100'	300	12 ea.	023316-100134
CGS815	#8-1/4"	150'	300	6 ea.	023316-100080
CGS820	#8-1/4"	200'	300	6 ea.	023316-007181
CGS812	#8-1/4"	1200'	300	1 sp.	023316-005279
CGS101	#10-5/16"	100'	350	6 ea.	023316-002827

COTTON THEATRICAL CORD

All purpose unpolished solid braid. Manufactured from a blend of dyed cotton and man-made fibers. Economy lightweight braid.



Item No:	Size	Footage	Color	Break Test (lbs.)	Std. Pack	UPC Code
CTH810	#8-1/4"	100'	Black	270	12 ea.	023316-002360
CTH101	#10-5/16"	100'	Black	325	6 ea.	023316-003640

Premium SOLID BRAIDED COTTON SASHCORD

Low stretch, easy to handle, abrasion resistant, polished. Smoothness minimizes snags. Remains soft, flexible and non-kinking. Holds knots securely. CONNECTED HANKS.

USES: Lightweight indoor/outdoor clothesline, tie-down, excellent all purpose cord.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CNS710	#7-7/32"	100'	415	12 ea.	023316-100400
CNS805	#8-1/4"	50'	444	12 ea.	023316-100424
CNS810	#8-1/4"	100'	444	12 ea.	023316-100431
CNS812R	#8-1/4"	1200'	444	1 sp.	023316-001844
CNS101	#10-5/16"	100'	565	6 ea.	023316-100356
CNS106	#10-5/16"	600'	565	1 sp.	023316-005286
CNS121	#12-3/8"	100'	865	6 ea.	023316-100370
CNS126	#12-3/8"	600'	865	1 sp.	023316-005293

PREMIUM 3 STRAND MANILA ROPE

Strongest and best quality of natural fibers. The finest Manila available today. Smooth and easy to handle. Low stretch for abrasion resistance. Holds knots very securely. Resistant to sunlight.

USES: Heavy marine, industry, construction and rigging tree work. Excellent for use with pulleys.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CRMS21	1/4"	50'	540	1 ea.	023316-100905
CRMS22	1/4"	100'	540	1 ea.	023316-100912
CRMS41	3/8"	50'	1220	1 ea.	023316-100929
CRMS42	3/8"	100'	1220	1 ea.	023316-100936
CRMS61	1/2"	50'	2380	1 ea.	023316-100943
CRMS62	1/2"	100'	2380	1 ea.	023316-100950
CRMS51	5/8"	50'	3960	1 ea.	023316-004845
CRMS52	5/8"	100'	3960	1 ea.	023316-005309
CRMS31	3/4"	50'	4860	1 ea.	023316-004838
CRMS32	3/4"	100'	4860	1 ea.	023316-005316
CRMS1	1"	50'	8100	1 ea.	023316-003732
CRMS12	1"	100'	8100	1 ea.	023316-005323

PREMIUM 3 STRAND MANILA ROPE

Strongest and best quality of natural fibers. The finest Manila available today. Smooth and easy to handle. Low stretch for abrasion resistance. Holds knots very securely. Resistant to sunlight.

USES: Heavy marine, industry, construction and rigging tree work. Excellent for use with pulleys.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CRM14/R	1/4"	1200	540	1 reel/coil	023316-001868
CRM516/R	5/16"	600'	900	1 reel/coil	023316-005347
CRM38/R	3/8"	600'	1220	1 reel/coil	023316-001875
CRM12/R	1/2"	600'	2380	1 reel/coil	023316-001882
CRM583/R	5/8"	300'	3960	1 reel/coil	023316-005354
CRM58/R	5/8"	600'	3960	1 reel/coil	023316-001899
CRM343R	3/4"	300'	4860	1 reel/coil	023316-005361
CRM34/R	3/4"	600'	4860	1 reel/coil	023316-001905
CRM1/R	1"	300'	8100	1 reel/coil	023316-005378
CRM112F	1 1/2"	600'	13000	1 coil	023316-005392
CRM2F	2"	600'	27000	1 coil	023316-005590

1 1/2" & 2" cut to order with an additional 15% cutting charge.

NATURAL FIBERS

We welcome inquiries for non-listed items or special constructions, lengths, diameters and colors!

TWISTED NYLON MASON LINE

Extremely strong twisted twine. Made from 100% filament nylon. Outlasts natural fibers. Built-in stretch for shock absorption. Excellent resistance to rot, abrasion and household chemicals.

USES: Also referred to as seine twine. Excellent for fishing line, net repair, construction and masonry work. Multipurpose household use. Fluorescent colors for professional tradesmen, offers extra high visibility.



Item No:	Ply	Footage	Color	Break Test (lbs.)	Std. Pack	UPC Code
CNM184	18	243'	White	135	12 ea.	023316-100219
CNM184B	18	243'	Black	135	12 ea.	023316-007686
CNM181	18	1090'	White	135	12 ea.	023316-005767
CNM244	24	185'	White	212	12 ea.	023316-000854
CNM248	24	370'	White	212	6 ea.	023316-100240
CNM241	24	710'	White	212	12 ea.	023316-000830
CNMY244	24	185'	Yellow	212	12 ea.	023316-000847
CNMY248	24	370'	Yellow	212	12 ea.	023316-100196
CNFY244	24	185'	Flor.Yellow	212	12 ea.	023316-100363
CNFO244	24	185'	Flor.Orange	212	12 ea.	023316-100264
CNFP244	24	185'	Flor.Pink	212	12 ea.	023316-003206
CNFG244	24	185'	Flor.Green	212	6 ea.	023316-100257
CNFO248	24	370'	Flor.Orange	212	6 ea.	023316-005668
CNFP248	24	370'	Flor.Pink	212	6 ea.	023316-005675
CNFG248	24	370'	Flor.Green	212	6 ea.	023316-005682
CNFY248	24	370'	Flor.Yellow	212	6 ea.	023316-005675

BRAIDED NYLON MASON LINE

Same characteristics as Twisted Nylon. Braided twines will not unravel when cut.

USES: Same as Twisted Nylon



Item No:	Ply	Footage	Color	Break Test (lbs.)	Std. Pack	UPC Code
CNMB244	24	150'	Wht/Black	212	12 ea.	023316-001356
CNMYB244	24	150'	Ylw/Black	212	12 ea.	023316-001349
CNMGB244	24	150'	Frst Green	212	12 ea.	023316-001363

NYLON FIBERS

NYLON PARACHUTE CORD

Colored braided nylon cord available in assorted colors. Great for arts and crafts, camping and boating.

USES: General all purpose utility cord.



Item No:	Size	Footage	Color	Break Test (lbs.)	Std. Pack	UPC Code
CPA50B	5-5/32"	50'	Black	325	12 ea.	023316-004647
CPA50G	5-5/32"	50'	Green	325	12 ea.	023316-004654
CPA50BL	5-5/32"	50'	Blue	325	12 ea.	023316-006634
CPA50C	5-5/32"	50'	Camouflage	325	12 ea.	023316-007891
CPA50R	5-5/32"	50'	Red	325	12 ea.	023316-007945
CPA50SD	5-5/32"	50'	Silver Dia.	325	12 ea.	023316-008430
CPFY50	5-5/32"	50'	Flor.Yellow	325	12 ea.	023316-004685
CPFO50	5-5/32"	50'	Flor.Orange	325	12 ea.	023316-004692
CPFG50	5-5/32"	50'	Flor.Green	325	12 ea.	023316-004678
CPFP50	5-5/32"	50'	Flor.Pink	325	12 ea.	023316-006641

BRAIDED NYLON VENETIAN BLIND CORD

Extremely strong braided cord. Outlasts natural fibers. Uniformly round cord with a smooth surface. It will not unravel when cut and will not flatten. Built-in stretch for shock absorption. Excellent resistance to rot, abrasion, and household chemicals.

USES: Window/drapery treatments, awning cord, Ideal for use with pulleys.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CV145N	4.5-9/64"	48'	92	12 ea.	023316-101766

BRAIDED NYLON TRAVERSE CORD

Same characteristics as the Venetian Blind Cord.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CTRN35	3.5-7/64"	48'	45	12 ea.	023316-101551

POLYESTER MINI BLIND CORD

Manufactured with a unique process to yield an extremely flexible smooth braid, with a minimal end fraying.

USES: Mini-blind and pleated shade cord.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CN2024	1.4mm	150'	105	12 ea.	023316-101858

WAXED NYLON WITH NEEDLE

Single strand nylon with wax coating. (Includes needle)

USES: Upholstery mending, repairs, crafts.



Item No:	Size	Footage	Color	Break Test (lbs.)	Std. Pack	UPC Code
CTN3W	3-3/32"	150'	White		12 ea.	023316-101476
CTN3T	3-3/32"	150'	Tan		12 ea.	023316-101483
CTN3B	3-3/32"	150'	Black		12 ea.	023316-002285

NYLON STARTER CORD

Braided Nylon used as a pull cord for power equipment.

USES: Starting lawn mowers and snow blowers.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
SC4250	4-1/8"	250'	107	1 ea.	023316-005453
SC6200	6-3/16"	200'	198	1 ea.	023316-005460

LOCK BRAID NYLON

Braided Nylon different construction from our solid braided nylon.

USES: Boating, camping, hammocks and swings. Works well with pulleys.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CLT810	8-1/4"	1000'	765	1 ea.	023316-005439
CLT910	9-9/32"	1000'	1000	1 ea.	023316-005446

SOLID BRAID NYLON

Extremely strong solid braid durable cord. Outlasts natural fibers. Uniformly round cord with a smooth surface. It will not unravel when cut and will not flatten. Built in stretch for shock absorption. Excellent resistance to rot, abrasion, and household chemicals.

USES: Boating, camping hammocks and swings. Works well with pulleys. General all purpose use. Applications where strength and durability are a factor.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CN45	4-1/8"	50'	425	12 ea.	023316-100578
CN55	5-5/32"	50'	625	12 ea.	023316-100592
CN65	6-3/16"	50'	750	12 ea.	023316-100622
CN75	7-7/32"	50'	900	12 ea.	023316-100653
CN85	8-1/4"	50'	1200	12 ea.	023316-000533
CN81	8-1/4"	100'	1200	6 ea.	023316-100660
CN125	12-3/8"	50'	2500	6 ea.	023316-006580
CN165	16-1/2"	50'	4000	6 ea.	023316-006597
CN3100	3-3/32"	1000'	275	1 sp.	023316-005422
CN410	4-1/8"	1000'	425	1 sp.	023316-001967
CN550	5-5/32"	500'	625	1 sp.	023316-004708
CN510	5-5/32"	1000'	625	1 sp.	023316-004715
CN650	6-3/16"	500'	750	1 sp.	023316-001974
CN610	6-3/16"	1000'	750	1 sp.	023316-004722
CN850	8-1/4"	500'	1200	1 sp.	023316-001981
CN810	8-1/4"	1000'	1200	1 sp.	023316-004739
CN1050	10-5/16"	500'	1900	1 sp.	023316-001998
CN1250	12-3/8"	500'	2500	1 sp.	023316-004746
CN1630	16-1/2"	300'	4000	1 sp.	023316-004753

PREMIUM 3 STRAND TWISTED NYLON

Our top quality rope for strength and reliability. High tensile strength and elasticity for shock absorption. Abrasion resistance. Resists rot, oils, marine growth, gasoline and most chemicals.

USES: Anchor line, winches, mooring and dock line. Use where strength, high abrasion resistance and durability are required. * Life of this product will be extended when stored away from direct sunlight.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CRN250	1/4"	50'	1490	1 ea.	023316-101186
CRN2100	1/4"	100'	1490	1 ea.	023316-101179
CRN450	3/8"	50'	3090	1 ea.	023316-101209
CRN4100	3/8"	100'	3090	1 ea.	023316-101193
CRN650	1/2"	50'	5510	1 ea.	023316-101223
CRN6100	1/2"	100'	5510	1 ea.	023316-101216

PREMIUM 3 STRAND TWISTED NYLON

Same characteristics as above.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CNN26	1/4"	600'	1490	1 reel	023316-002025
CNN12	1/4"	1200'	1490	1 reel	023316-001912
CNN36	5/16"	600'	2300	1 reel	023316-002032
CNN46	3/8"	600'	3090	1 reel	023316-001929
CNN63	1/2"	300'	5510	1 reel	023316-002049
CNN66	1/2"	600'	5510	1 reel	023316-001936
CNN83	5/8"	300'	9350	1 reel	023316-002056
CNN86	5/8"	600'	9350	1 reel	023316-001943
CNN93	3/4"	300'	12800	1 reel	023316-002063
CNN96	3/4"	600'	12800	1 reel	023316-001950
CNN113	1"	300'	22600	1 reel	023316-005477

We welcome inquiries for non-listed items or special constructions, lengths, diameters and colors!

PLASTIC DRYER CORD

A weather resistant clothesline. The smooth plastic coating is easy to wipe clean. Wire core for added strength.

USES: Indoor/outdoor clothesline. Dryer rack, umbrella style dryer. All purpose tie-down.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CCP55	5-5/32"	50'	165	12 ea.	023316-100059

POLY TYING TWINE

Strong, lightweight, outlasts natural fibers. Resistant to rot. Holds knots securely.

USES: Packaging, bundling. Strong all-purpose tying twine.



Item No:	Ply	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CTP450	1 PLY	450'-8 oz.	165	12 ea.	023316-101520
CTP900	1 PLY	900'-16 oz.	165	6 ea.	023316-101537
CTO18	1 PLY	8500'-10#	165	1 box	023316-101865
CTO28	2 PLY	4250'-10#	370	1 box	023316-101872

DELTA BRAID CORD

Polyester cord reinforced with a dupont kevlar. Extremely low stretch, easy to knot and non slip.

USES: General all purpose utility cord. Outperforms all other clotheslines.



Item No:	Size	Footage	Color	Break Test (lbs.)	Std. Pack	UPC Code
CDK805	8-1/4"	50'	Blk/Yelw.	372	12 ea.	023316-001479

MULTIFILAMENT CORD

Solid Braid, extremely strong, low stretch, reinforced core. Looks and feels like nylon, with the same characteristics of polypropylene. Will not float.

USES: Clothesline, utility rope. Use where strength and durability are a factor.



Item No:	Size	Footage	Color	Break Test (lbs.)	Std. Pack	UPC Code
CPM810	8-1/4"	100'	White	578	12 ea.	023316-100868
CPB810	8-1/4"	100'	Blue/White	547	12 ea.	023316-100790

DELTA BRAID CORD

UV enhanced soft MFP Polypro. Soft, flexible and lightweight yet strong. Holds knots well and it floats.

USES: All purpose utility cord.



Item No:	Size	Footage	Color	Break Test (lbs.)	Std. Pack	UPC Code
CDB605BL	6-3/16"	50'	Bl./Red/Wh	360	12 ea.	023316-007983
CDB705C	7-7/32"	50'	Camouflage	490	12 ea.	023316-006399
CDB805	8-1/4"	50'	Yellow/Red	540	12 ea.	023316-005750
CDB805BL	8-1/4"	50'	Blue/Yellow	540	12 ea.	023316-006030
CDB805BKY	8-1/4"	50'	Black/Yelw	540	12 ea.	023316-007396
CDB805BK	8-1/4"	50'	Black	540	12 ea.	023316-008409
CDB125	12-3/8"	50'	Yellow/Red	976	6 ea.	023316-005736
CDB125BL	12-3/8"	50'	Blue/Yellow	976	6 ea.	023316-006207

WIRE CENTER POLYESTER ROPE

Braided Polyester Rope is nearly as strong as nylon when a steady pull is exerted. But, it will not absorb the shock as well as nylon. Superior to nylon in abrasion resistance. Resists rot, oils, marine growth, gasoline, and most chemicals. It will not float. Inside 1/16" (7x7) galvanized wire.

USES: All purpose. Can not be cut easily. Flagpole rope and clothesline.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CGP810	8-1/4"	1000'		1 reel	023316-001851

EQUESTRIAN/DERBY ROPE

Stong, flexible, lightweight and it floats. Resistance to abrasion, oil, grease and chemicals.

USES: Marine applications and all purpose utility rope.



Item No:	Size	Footage	Color	Break Test (lbs.)	Std. Pack	UPC Code
CEQ12BK	1/2"	300'	Black	1900	1 spool	023316-004821
CEQ12BL	1/2"	300'	Blue	1900	1 spool	023316-004760
CEQ12R	1/2"	300'	Red	1900	1 spool	023316-004784
CEQ58BKW	5/8"	150'	Black/White	2870	1 spool	023316-004791
CEQ58BW	5/8"	150'	Blue/White	2870	1 spool	023316-004807
CEQ58RW	5/8"	150'	Red/White	2870	1 spool	023316-005583

TWISTED POLY DACRON ROPE

Looks like nylon. A combination of polyester over polypropylene. Easy to handle. Exceptional strength and lighweight. It will not float.

USES: Commerical fishing, electric utility, industrial and excellent all-purpose use.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CRTD4	1/2"	600'	5200	1 reel	023316-005514
CRTD5	5/8"	600'	7875	1 reel	023316-006023
CRTD6	3/4"	600'	9450	1 reel	023316-005545

POLYESTER TWIN BRAID ROPE

Polyester twin braid is a balanced construction , high tensile strength and low elongation.

USES: Excellent choice for sheets and halyards. It is also ideally suited for a number of construction and utility applications where a high-quality, low stretch rope is essential.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CRPB3	3/8"	600'	2881	1 reel	023316-005552
CRPB4	1/2"	600'	4818	1 reel	023316-005569

TWISTED POLYPROPYLENE ROPE COILETTES

Polypropylene Rope is designed to be very durable. It is light-weight and floats. Resistant to rot, acids, oils, grease, gasoline and most chemicals. Low stretch and flexible.

USES: Water sports, pool marker, tow-line and tie down. Barrier marker, camping and general utility rope.

CARE: Fast drying and easy to store. The life of this product will be extended when stored away from direct sunlight.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CRP250	1/4"	50'	1250	1 ea.	023316-101261
CRP2100	1/4"	100'	2440	1 ea.	023316-101254
CRP450	3/8"	50'	2440	1 ea.	023316-101308
CRP4100	3/8"	100'	2440	1 ea.	023316-101292
CRP650	1/2"	50'	3780	1 ea.	023316-101339
CRP6100	1/2"	100'	3780	1 ea.	023316-101322

TWISTED POLYPROPYLENE ROPE

Same characteristics as above.



Item No:	Size	Footage	Break Test (lbs.)	Std. Pack	UPC Code
CRP2	1/4"	1200'	1250	1 reel	023316-001509
CRP3	5/16"	600'	1710	1 reel	023316-001516
CRP4	3/8"	600'	2440	1 reel	023316-001523
CRP6	1/2"	600'	3780	1 reel	023316-001547
CRP8	5/8"	600'	5600	1 reel	023316-001554
CRP9	3/4"	600'	7650	1 reel	023316-001561
CRP13	1"	300'	12600	1 reel	023316-003718

We welcome inquiries for non-listed items or special constructions, lengths, diameters and colors!

METAL HEAVY DUTY PULLEYS

Metal Heavy Duty pulley that will not rust.

Uses: This product is to be used only as a clothesline pulley.



Item No:	Size	Std. Pack	UPC Code
HCA55	5 1/2"	1 ea.	621988-902874
HCA56	6 1/2"	1 ea.	621988-902904
HCA59	8"	1 ea	621988-901716

GALVANIZED PULLEY

General galvanized clothesline pulley.

Uses: This product is to be used only as a clothesline pulley.



Item No:	Size	Std. Pack	UPC Code
HCA606	5"	12 ea.	023316-008058

PLASTIC CLOTHESLINE PULLEY EVERLAST

Rugged, Non-Rusting, Reinforced Nylon Bracket. Nylon bearing ensures quiet performance.

Uses: Outdoor clothesline




Item No:	Size	Color	Std. Pack	UPC Code
HCA50	4"	White	12 ea.	731271-000504
HCA40	5"	Black	12 ea.	731271-000405

UTILITY PULLEY EVERLAST

Uses: Outdoor clothesline

Item No:	Size	Std. Pack	UPC Code
HCA60	2 1/2"	12 ea.	731271-000702



METAL DIVIDER

Uses: Outdoor clothesline

Item No:	Size	Std. Pack	UPC Code
HCA61	9 1/2"	12 ea.	621988-901853



PLASTIC CLOTHESLINE SPREADER

Uses: Outdoor clothesline

Item No:	Size	Color	Std. Pack	UPC Code
HCA888	7"	White	12 ea.	023316-008041



PLASTIC CLOTHESLINE SPREADER EVERLAST

Uses: Outdoor clothesline

Item No:	Size	Color	Std. Pack	UPC Code
HCA7	5 1/2"	Black	12 ea.	731271-000603



METAL LINE TIGHTNER

No sagging lines. One pull and line is tight. For clothesline, plastic cord and wire from 1/8" to 5/16" diameter. Rustproof will not rust clothesline.

Hardened ball bearings

Uses: Outdoor clothesline

Item No:	Std. Pack	UPC Code
HCA70	12 ea.	023316-201800




EVERLAST PLASTIC LINE TIGHTNER

"Breeze-Easy". Sets up & Maintains Rope Tension. Easy to load and release. Reinforced impact resistant polymer. Heavy duty stainless steel springs. Load limit 100 lbs. Ideal for 3/16" through 3/8" solid rope.

Uses: Outdoor clothesline

Item No:	Std. Pack	UPC Code
HCA90	12 ea.	731271-000900



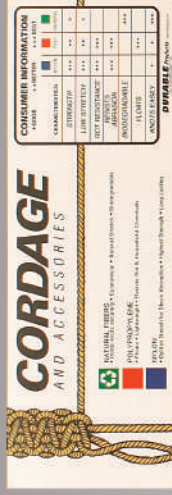

12 FOOT DISPLAY



8 FOOT DISPLAY



ITEM NO: ROPE 5
 WIDTH: 45"
 DEPTH: 19"
 HEIGHT: 95"


BULK-ROPE DISPLAY

CUSTOMER REFERENCE GUIDE


Librett
DURABLES

64 Main Street
New Rochelle, NY 10801
1-800-542-7388

ROPE DIAMETERS

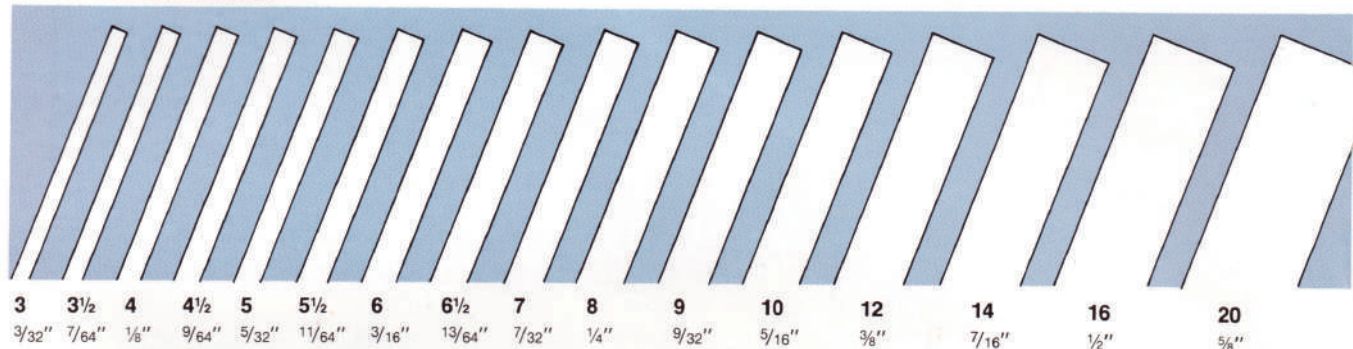

THREAD SIZES

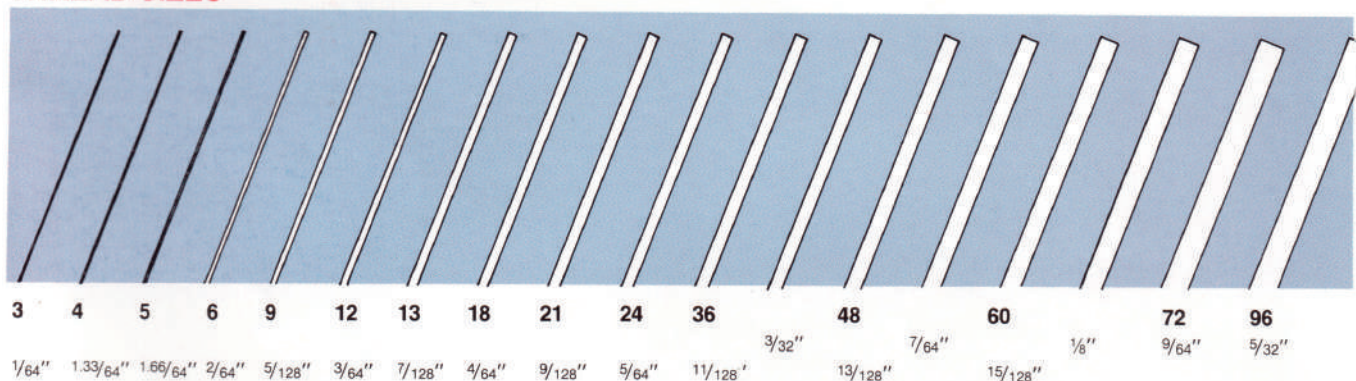

WORKING LOADS-are for rope in new condition.

Working loads should be reduced where life or limb are involved. Working loads are from 8% to 14% of the tensile strength.

TENSILE STRENGTH-applies to new unused rope.

DYNAMIC LOADING-occurs when rope is subjected to sudden or extreme stress. Figures given as working loads are void if rope has been subjected to dynamic loading, high temperatures, long periods of load, improper use or storage.

IMPORTANT WARNINGS

REMEMBER: ANY PRODUCT WILL BREAK IF ABUSED, MISUSED OR OVERUSED. Any well-designed and well-built product can become hazardous in the hands of a careless user.

Therefore: 1. **Never exceed the Work Load Limit.**

2. **Match components properly.**

3. **Keep out from under a raised load.**

4. **Avoid shock loads.**

5. **Inspect products regularly.**

ROPE SERVICE TIPS

- Protect rope from damage due to cutting and abrasion.
- Avoid knots when possible as they reduce the strength of a rope.
- Use splices.
- Store rope away from exposure to sun, moisture and heat.
- Do not run rope over sharp edges or around diameters that are less than eight times the diameter of the rope.
- Keep rope away from chemicals as most chemicals can be harmful to rope.

ROPE INSPECTION TIPS

Watch for:

1. Kinks and hockles.
2. Cuts, areas of abrasion, wear, fused surface yarns.
3. Excessive broken fibers and filaments.
4. Discoloration and roughness from chemical damage.
5. Brittleness and fiber weakness from exposure to UV rays.